



2019 LAMBORGHINI URUS 10.1" DUO

2019 AUDI A6, A7, A8, Q8 10.1" DUO

2019 AUDI A1, Q3 10.1" SINGLE

2019 VOLKSWAGEN TOUAREG 15"

2018 PORSCHE CAYENNE

2019 PORSCHE MACAN

MANUAL

1. SI92VT

MAIN BOARD




Car Brand	Model	Year Range	Screen Size
LAMBORGHINI	URUS	2019	10.1" DUO
PORSCHE	CAYENNE	2018	12.3"
	MACAN	2019	12.3"
AUDI	A6, A7, A8, Q8	2019	10.1" DUO
	A1, Q3	2019	10.1" SINGLE
VOLKSWAGEN	TOUAREG	2019	15"

COMPONENTS

1 MAIN UNIT 	2 POWER CABLE 	3 LVDS IN CABLE 	4 IR CABLE
5 TOUCH CABLE ※ OPTION ※	6 RGB CABLE ※ OPTION ※	7 4PIN FILM ※ OPTION ※	8 REMOTE CONTROL ※ OPTION ※
9 AV IN/OUT CABLE ※ OPTION ※	10 AV GENDER CABLE ※ OPTION ※	11 AV GENDER BOARD ※ OPTION ※	


※PLEASE CONNECT B+, IF CONNECT ACC WILL HAVE REALLY SHORT BLINK JUST ONCE WHEN SWITCH FROM AFTER MARKET NAVI TO OEM.※

HOW TO CONNECT (SI92VT)

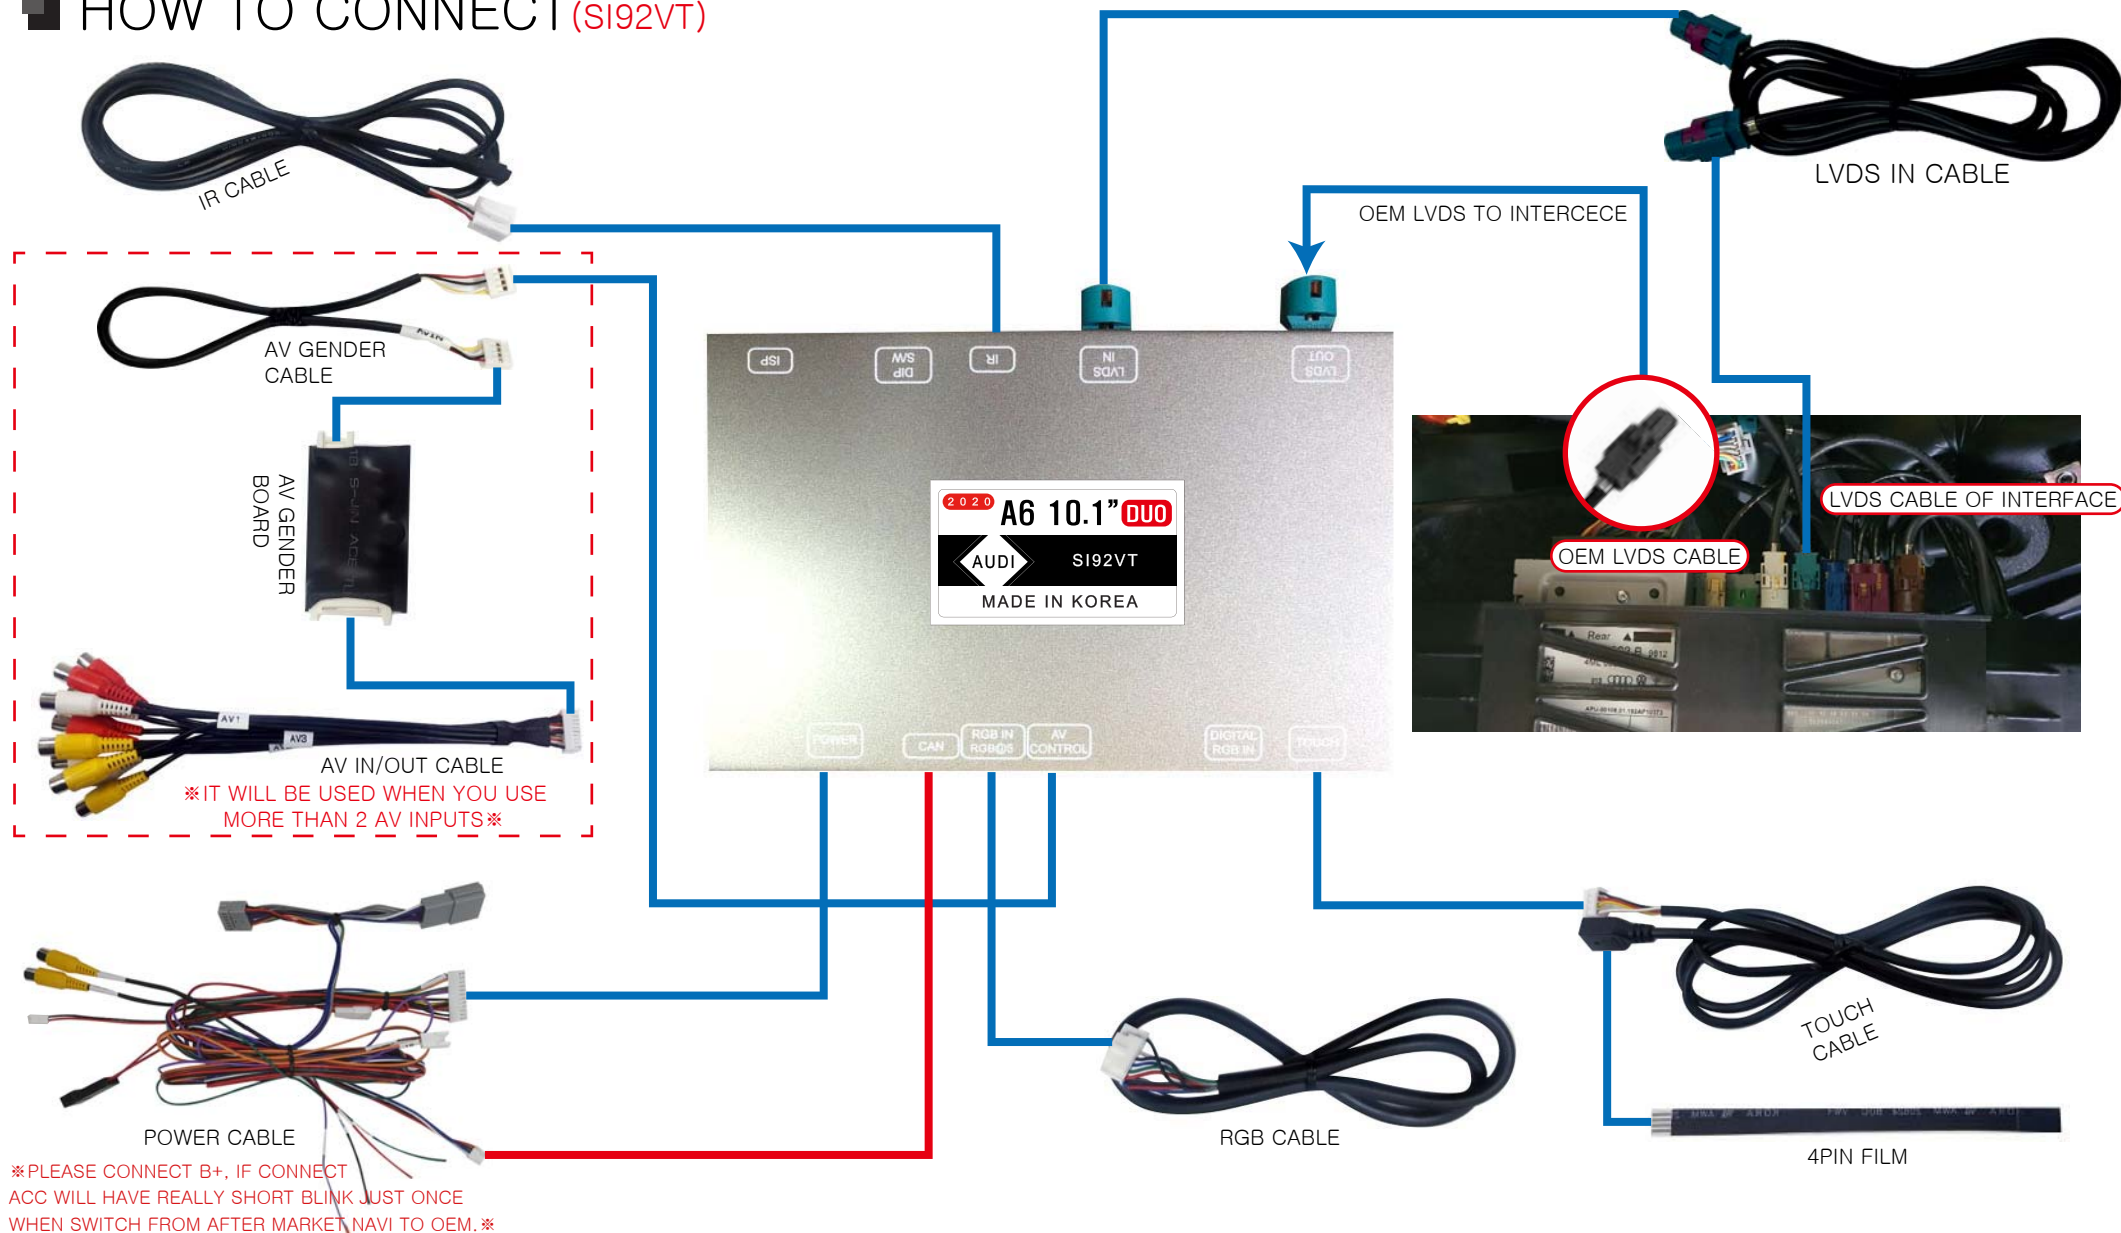

DIP S/W

OFF : ↑ (UP) / ON : ↓ (DOWN)

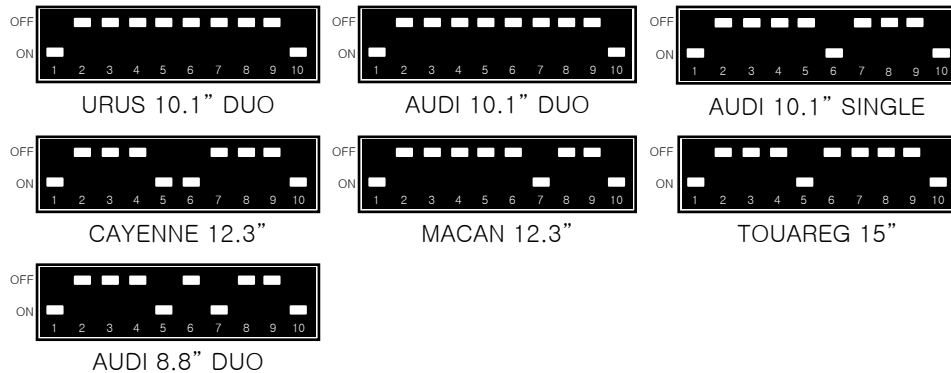

PIN	FUNCTION	DIP S/W SETTING
1	GPS INPUT MUTE	OFF : DO NOT USE GPS ON : USE GPS
2	FUNCTION SETTING	OFF : TV TOUCH (SI92VT) ON : TV FREE (SI92VF)
3	TV FREE ON/OFF	OFF : TV FREE (FUNCTION OFF) ON : TV FREE (FUNCTION ON)
4	REAR CAMERA	OFF : OEM CAMERA ON : AFTERMARKET CAMERA
5	VEHICLE SETTING	
6	VEHICLE SETTING	
7	VEHICLE SETTING	
8	ON	

※ PLEASE CONNECT B+, IF CONNECT ACC WILL HAVE REALLY SHORT BLINK JUST ONCE WHEN SWITCH FROM AFTER MARKET NAVI TO OEM. ※

SI92VT SPEC

1. INPUT SPEC

- 1 x Analog RGB Input(GPS system output)
- 1 x NAVI LVDS Input(GPS system output)
- 1 x LVDS Input
- 1 x LVDS output
- 1 x CVBS(rear camera)
- 1 x CVBS(front camera or A/V)
- 3 x A/V Input(Option)

2. OUTPUT SPEC

- 1 x CVBS
- 1 x Audio L/R


3. POWER SPEC

- Input power : 8VDC ~ 24VDC
- Consumption : 5WATT

4. SIZE


- 157*98*19mm(Width*Length*Height)

5. POWER 24pin

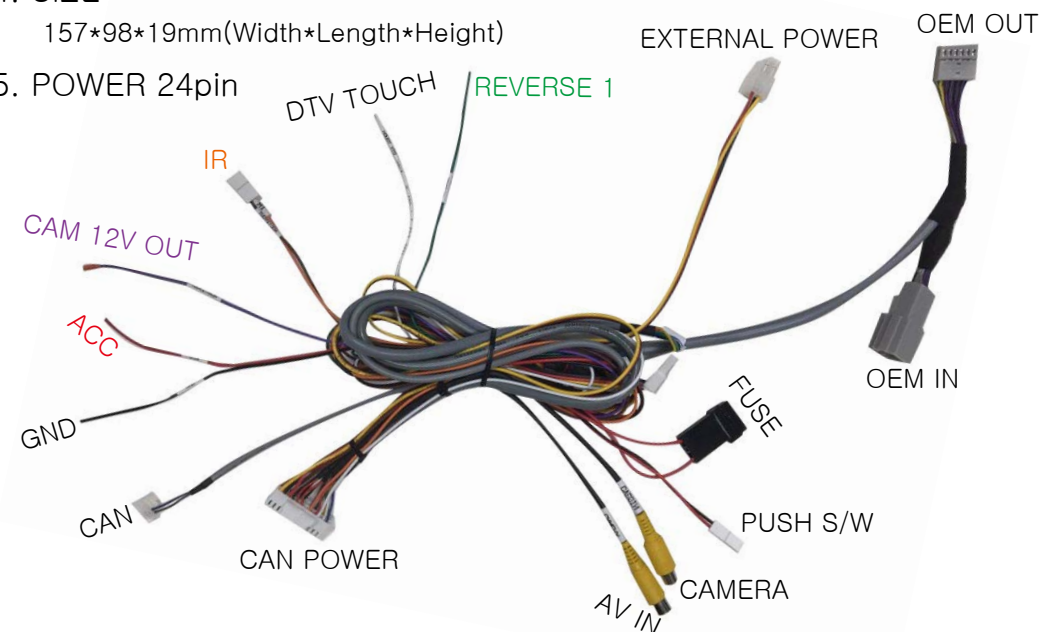


■ HOW TO CONNECT AUDI A6, A7, A8, Q8, URUS, TOUAREG


※PLEASE CONNECT B+, IF CONNECT ACC WILL HAVE REALLY SHORT BLINK JUST ONCE WHEN SWITCH FROM AFTER MARKET NAVI TO OEM.※

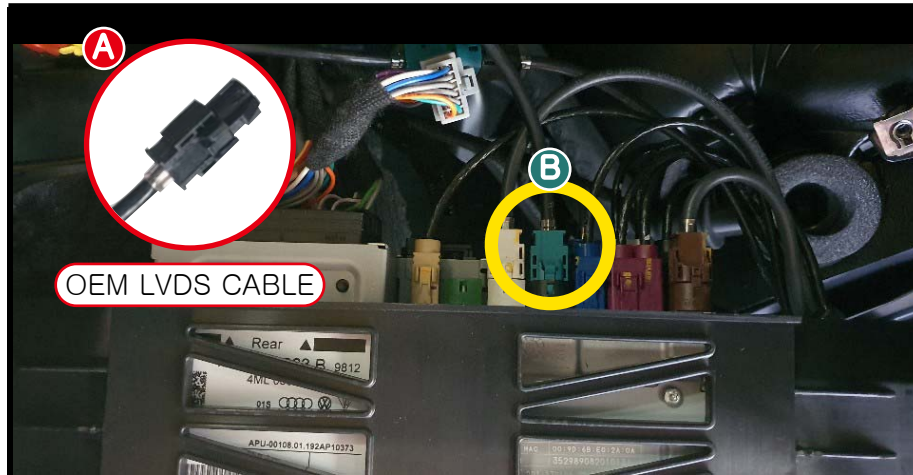


1. PLEASE PULL OUT OEM LVDS CABLE **A**, AND LVDS IN CABLE **B** OF INTERFACE CONNECT WITH HEAD UNIT.

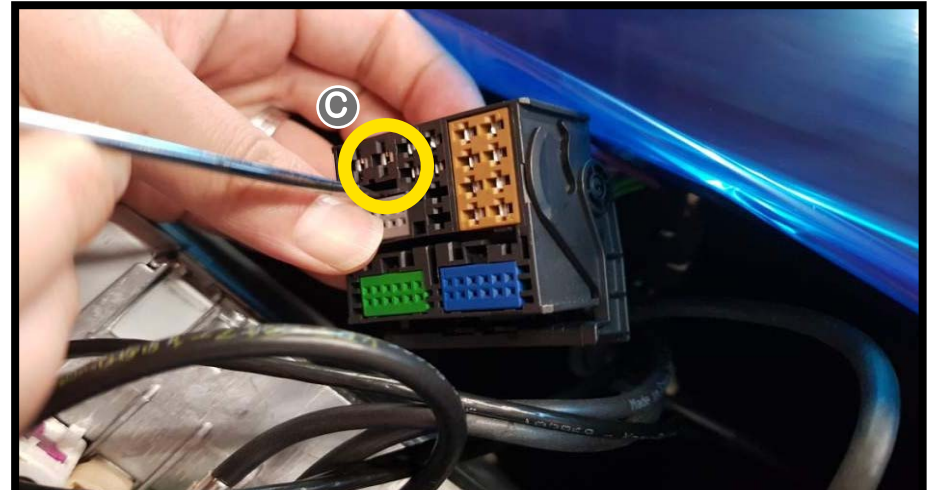

2. PLEASE REMOVE THE OEM CONNECTOR **C**.

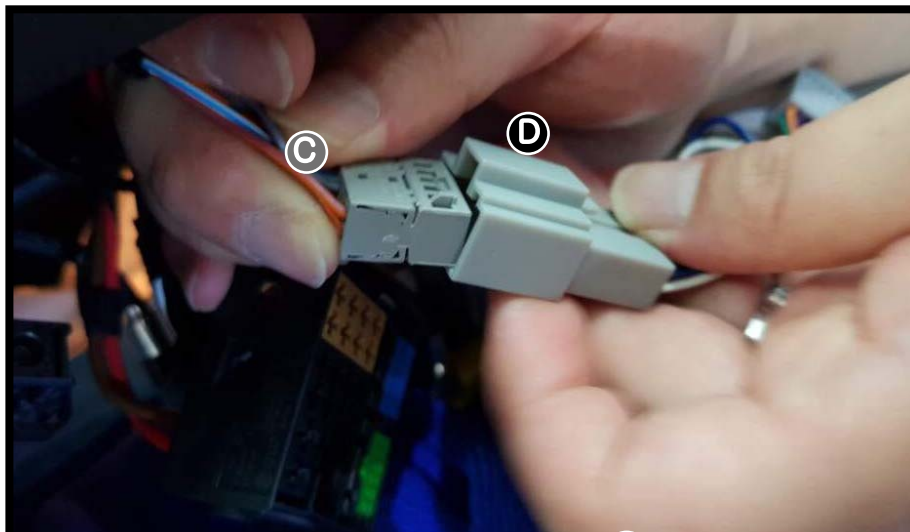

3. PLEASE USE REMOVED OEM CONNECTOR **C** CONNECT WITH **D** AS PICTURE SHOWN.

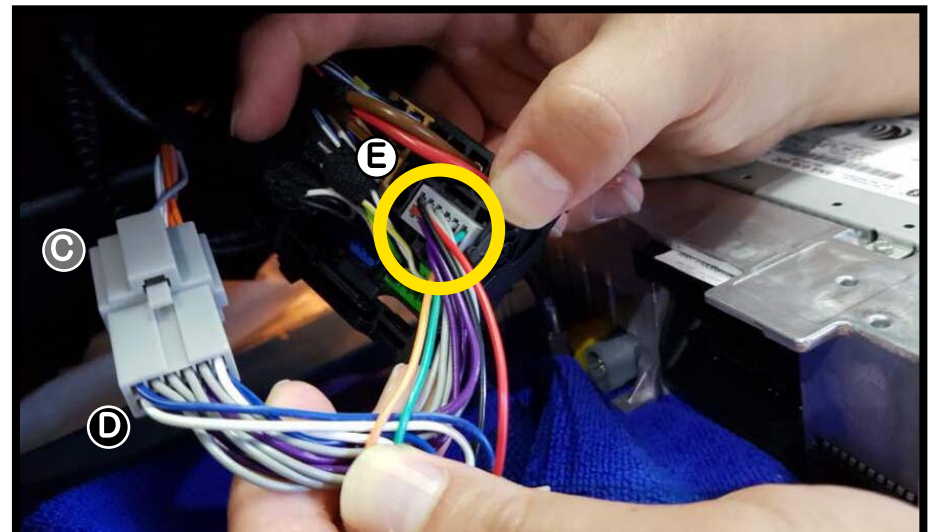

4. CONNECTED.

HOW TO SWITCH SCREEN(AUDI A1, Q3 10.1" SINGLE)

1



PRESS  FOR 2S WILL SWITCH SCREEN

OEM → GPS → AV1 → AV2 → AV3 → HDMI

HOW TO SWITCH SCREEN AUDI A6, A7, A8, Q8 10.1" DUO

1



2



– HOLD BUTTON 2S TO SWITCH MODE

OEM → GPS → AV1 → AV2 → AV3 → HDMI

※PLEASE CONNECT B+, IF CONNECT ACC WILL HAVE REALLY SHORT BLINK JUST ONCE WHEN SWITCH FROM AFTER MARKET NAVI TO OEM.※

■ HOW TO SWITCH SCREEN URUS 10.1" DUO

1



2



– HOLD   BUTTON 2S TO SWITCH MODE

OEM → GPS → AV1 → AV2 → AV3 → HDMI

↑

※PLEASE CONNECT B+, IF CONNECT ACC WILL HAVE REALLY SHORT BLINK JUST ONCE WHEN SWITCH FROM AFTER MARKET NAVI TO OEM.※

HOW TO SWITCH SCREEN TOUAREG 15"



– HOLD **A**  BUTTON 2S TO SWITCH MODE




– HOLD **B**  , **C**  BUTTON 2S TO SWITCH MODE

OEM → GPS → AV1 → AV2 → AV3 → HDMI


※PLEASE CONNECT B+, IF CONNECT ACC WILL HAVE REALLY SHORT BLINK JUST ONCE WHEN SWITCH FROM AFTER MARKET NAVI TO OEM.※


■ HOW TO SWITCH SCREEN CAYENNE & MACAN

1

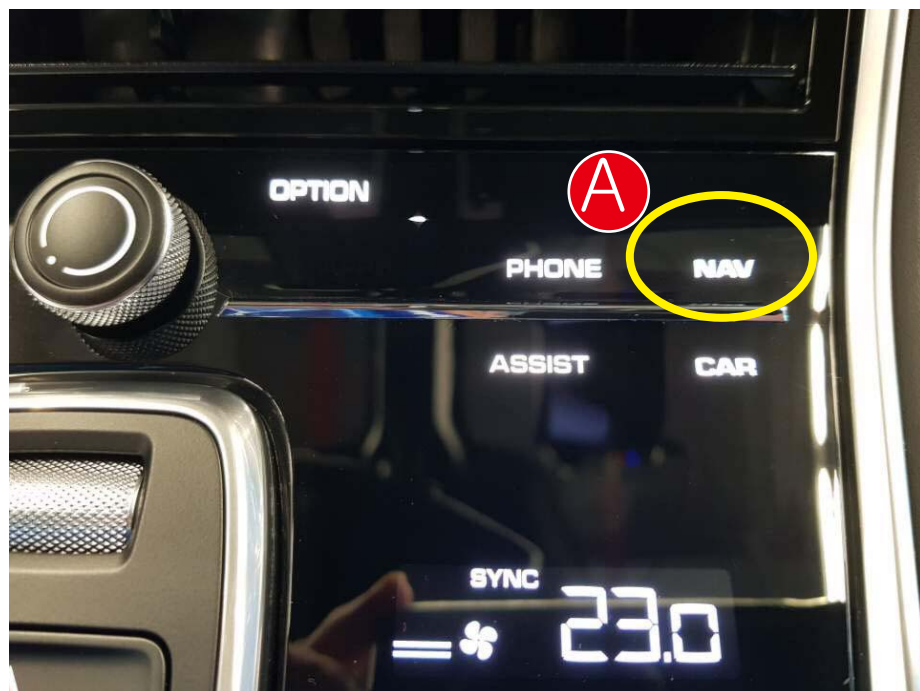

– HOLD **A** BUTTON 3S TO SWITCH MODE

2

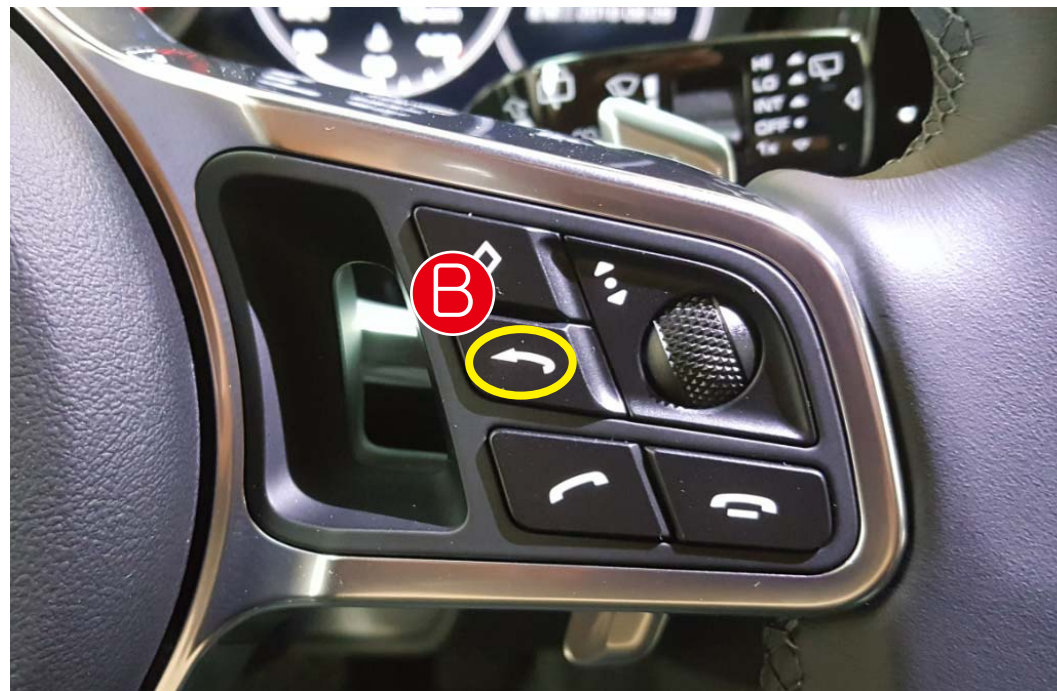

– HOLD **B** BUTTON 2S TO SWITCH MODE

OEM → GPS → AV1 → AV2 → AV3 → HDMI

■ HOW TO SWITCH SCREEN CAYENNE & MACAN (VIDEO IN MOTION, RECOGNIZATION OF SENSOR FUNCTION)

1



- HOLD **A** BUTTON 7S TO SET VIDEO IN MOTION ON/OFF
- HOLD **B** BUTTON 7S TO SET RECOGNIZATION OF SENSOR ON/OFF

■ CAYENNE & MACAN METHOD OF MODE SWITCH(RTC FUNCTION)


1



(OSD MENU -> SETTING -> RTC -> ON)

- HOLD  BUTTON 3S TO SWITCH BETWEEN FACTORY REAR CAMERA AND AFTERMARKET REAR INPUT.(VEHICLE WITH FACTORY REAR CAMERA)

HOW TO SWITCH SCREEN CAYENNE & MACAN (NAVI → PIP)

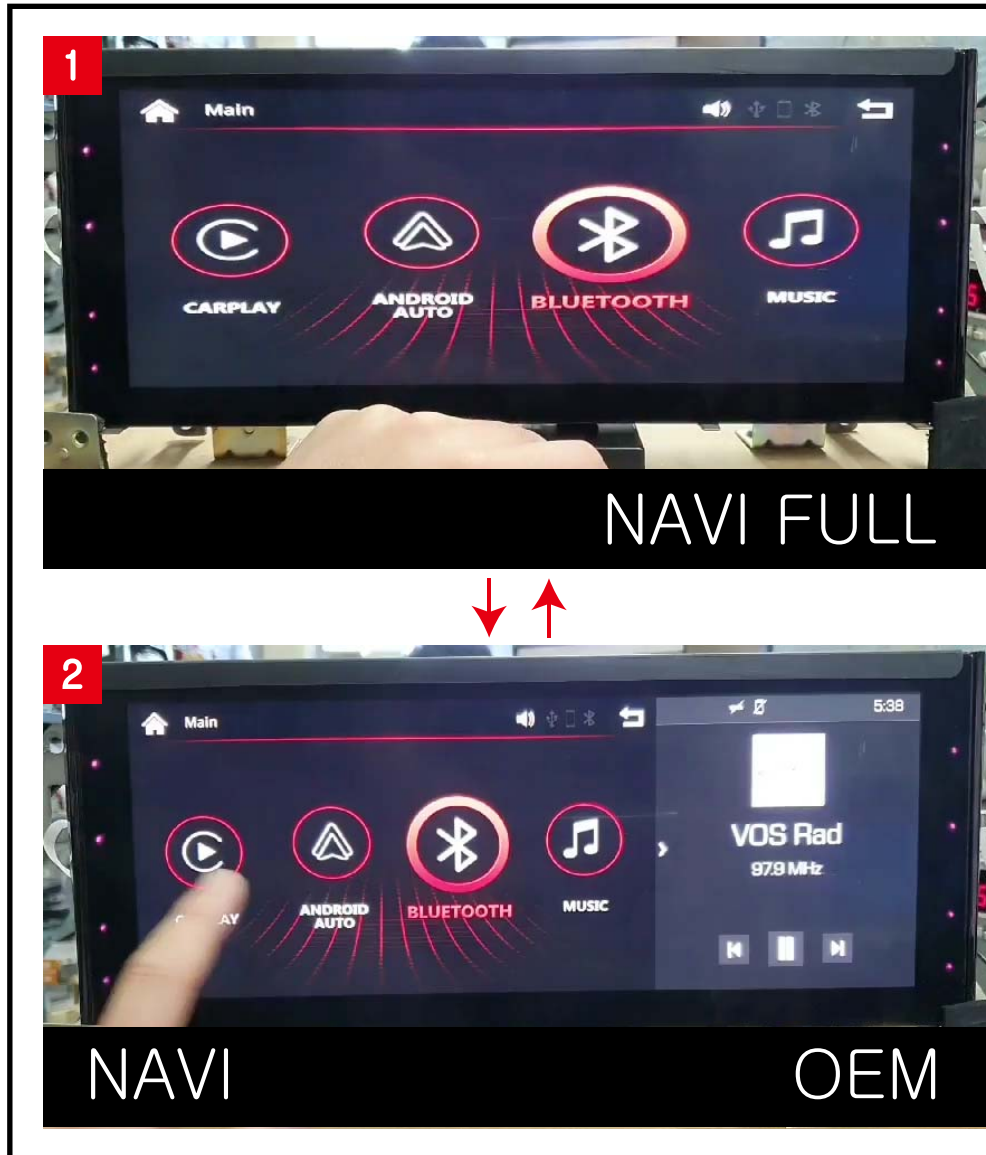


- HOLD **A** **OPTION** BUTTON 2S LONG TO SWITCH PIP MODE

HOW TO SWITCH SCREEN CAYENNE & MACAN(AV → PIP)



HOW TO CONNECT VIDEO AUDIO WHEN YOU ONLY USE ONE AV INPUT

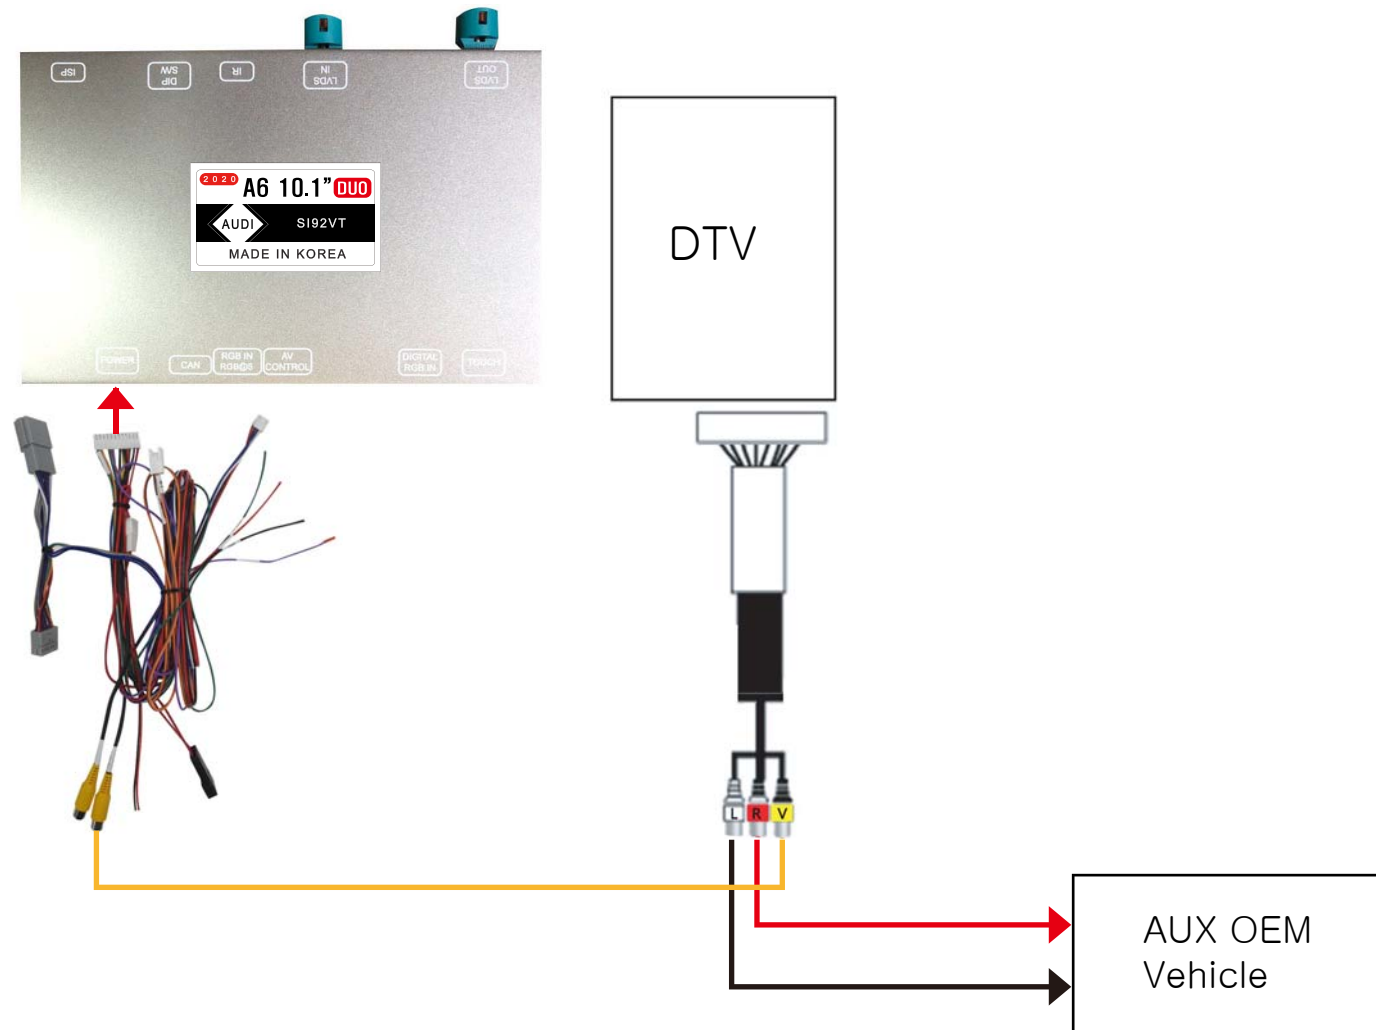

HOW TO CONNECT VIDEO AUDIO WHEN YOU USE MORE THAN 2 AV INPUTS

