




2016 PORSCHE FPCM 4.0 MANUAL

■ MAIN UNIT OF INTERFACE

1



**PORSCHE
[FPCM 4.0]**

Car Brand	Model	Year Range	System
PORSCHE	4.0	2016	

COMPONENTS

1 MAIN UNIT



2 MAIN CABLE



3 IR CABLE



4 LVDS CABLE (A TYPE)




5 REVERSE CABLE



6 REMOTE CONTROL




■ HOW TO CONNECT

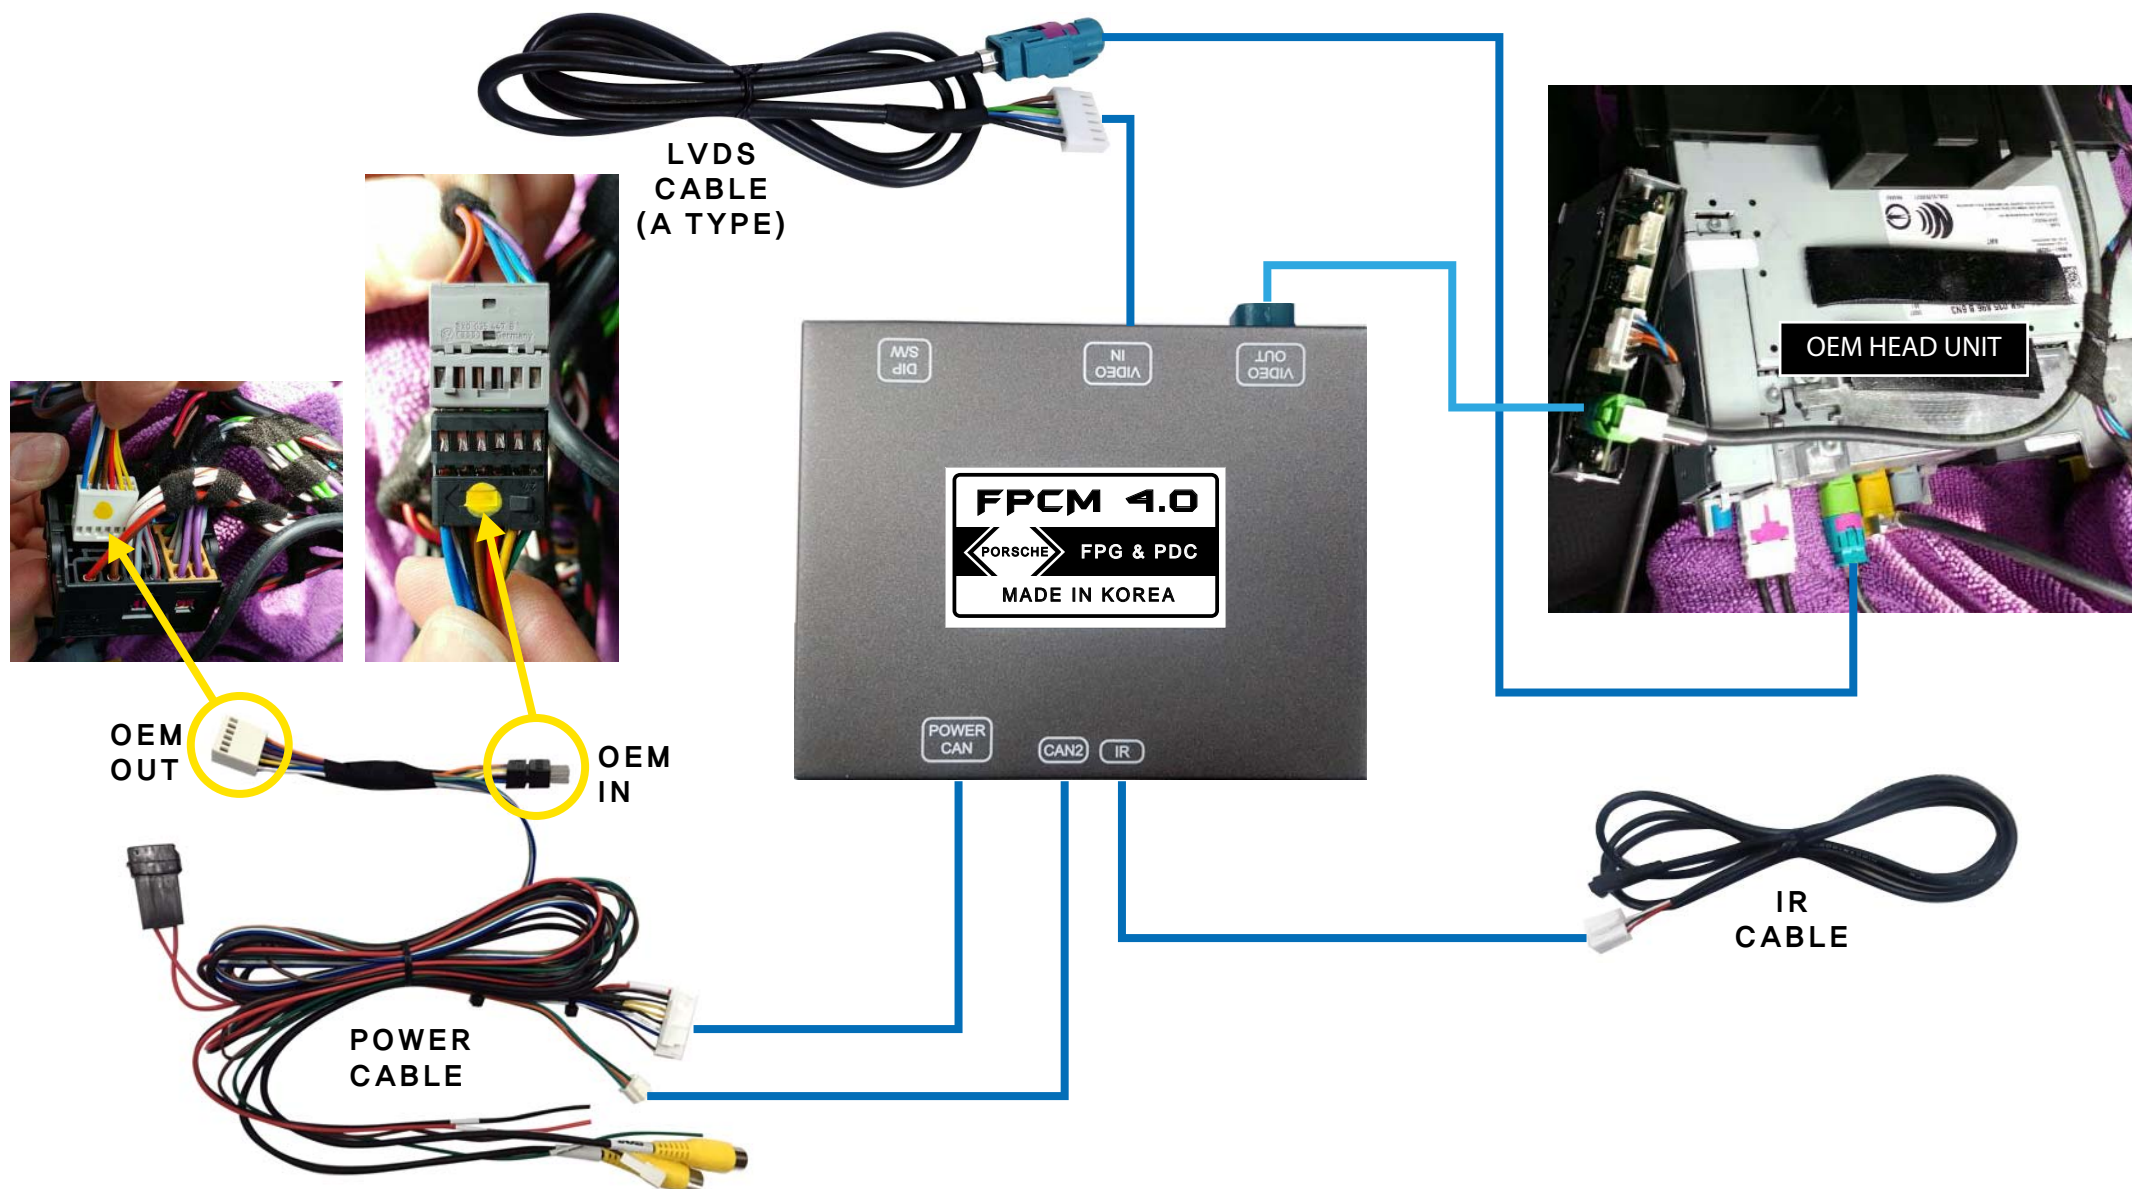


DIP S/W


OFF : ↑ (UP) / ON : ↓ (DOWN)

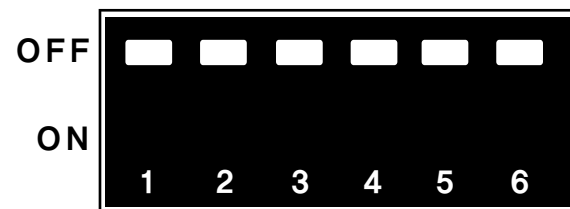

PIN	FUNCTION	DIP S/W SETTING
1		X
2		X
3	VEHICLE SETTING	OFF : A3 ON : PORSCHE 4.0
4	VEHICLE SETTING	X
5	RESOLUTION SETTING	OFF : 800 ON : 480
6		ON

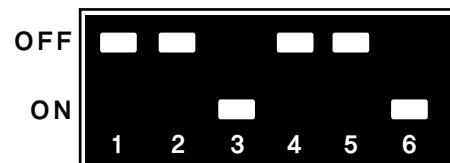

PORSCHE FPCM4.0

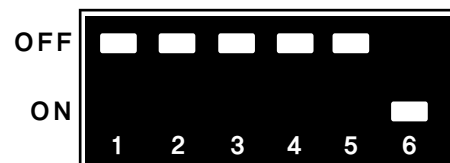

AUDI A3

FPCM 4.0 SPEC

1. INPUT SPEC

- 1 x LVDS Input
- 1 x CVBS(rear camera)
- 1 x CVBS(front camera or A/V)


2. POWER SPEC

- Input power : 8VDC ~ 18VDC
- Consumption : 5WATT


3. SIZE

- 108*86*20mm(Width*Length*Height)

4. POWER 10pin

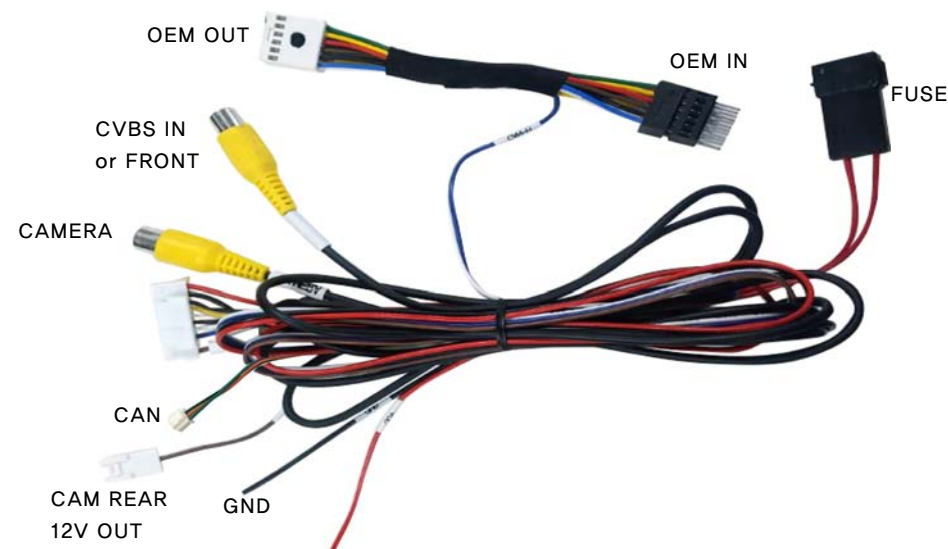


HOW TO CONNECT(1)

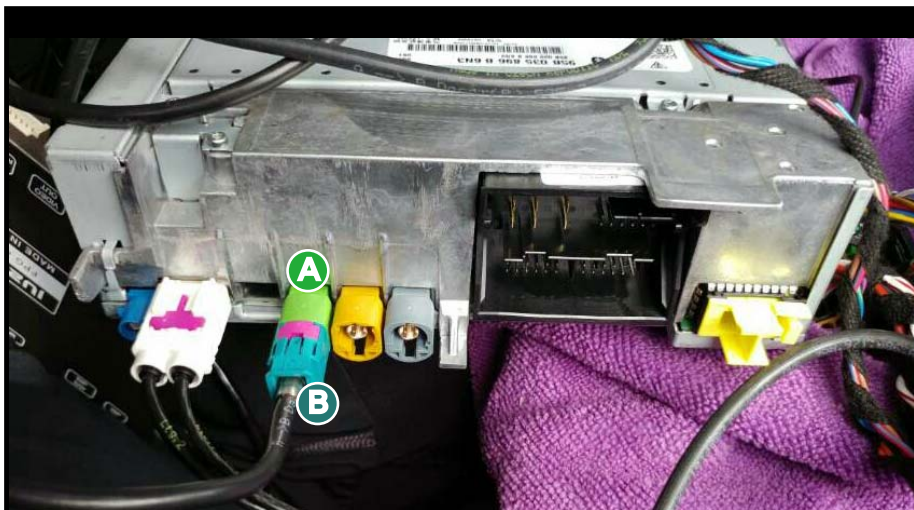


1. PLEASE PULL OUT OEM LVDS CABLE (A), AND LVDS IN CABLE (B) OF INTERFACE CONNECT WITH OEM (A).



2. PLEASE USE THE PULLED OUT OEM LVDS CABLE (A) CONNECT WITH LVDS IN OF INTERFACE.

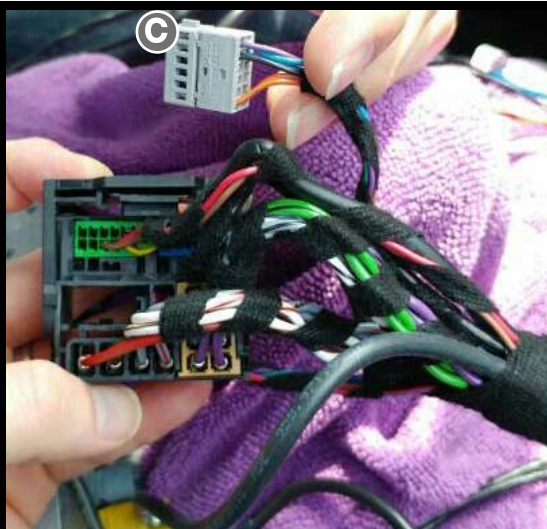


3. PLEASE REMOVE THE OEM CONNECTOR (C).

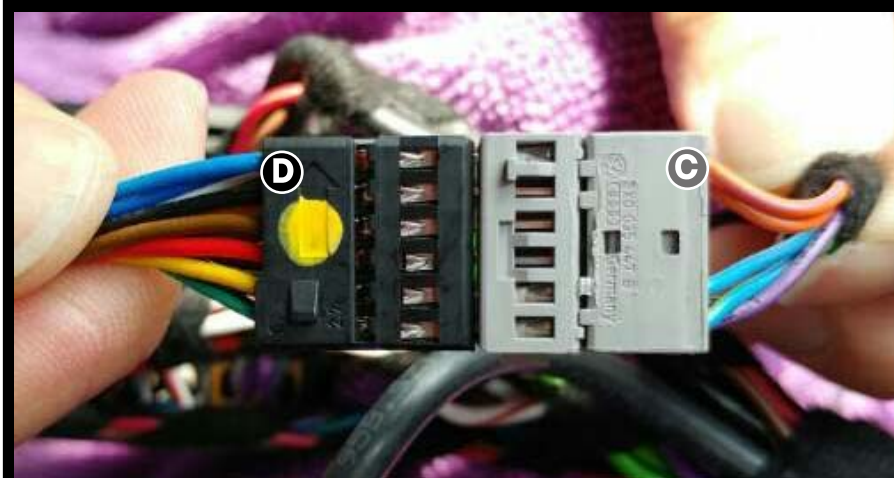

4. PLEASE USE REMOVED OEM CONNECTOR (C) CONNECT WITH (D) AS PICTURE SHOWED.

■ HOW TO CONNECT(2)

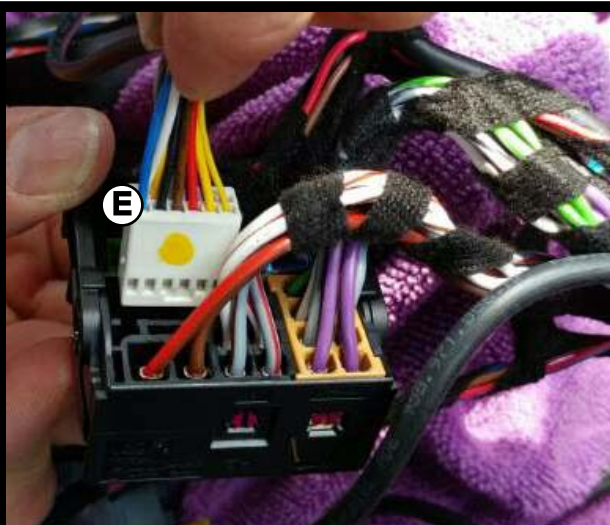


5. PLEASE CONNECT THE CONNECTOR **E** AS PICTURE SHOWN.

■ HOW TO SWITCH SCREEN(1)



PRESS **A** FOR SHORT WILL SWITCH SCREEN

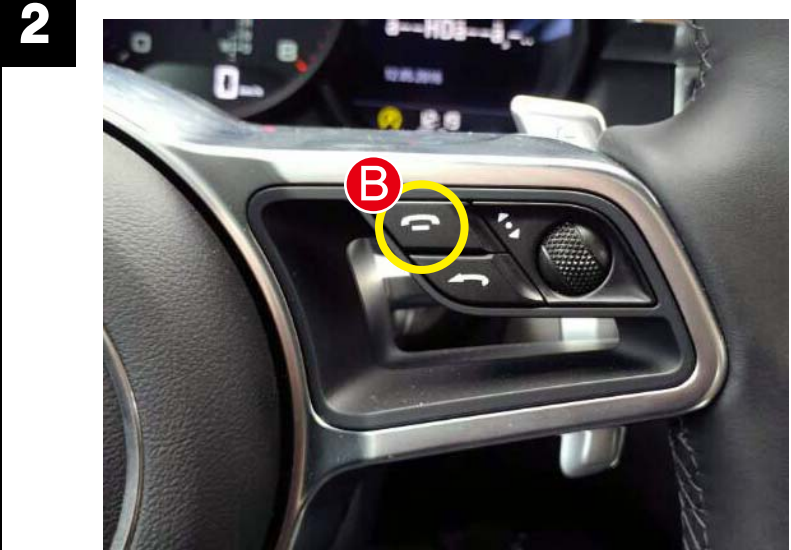


PRESS **B** FOR 2S WILL SWITCH SCREEN

OEM → FRONT CAMERA

HOW TO SWITCH SCREEN(2)

1 HOW TO SWITCH SCREEN MANDATORY BY IR

IT ONLY CAN USE ON ORIGINAL SCREEN
 : R/C ¹OK BUTTON 4TIMES + ²MENU BUTTON

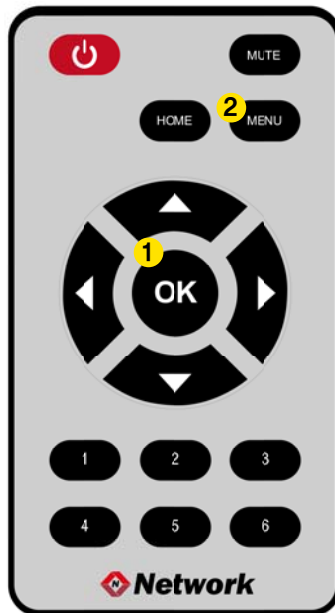

[인터페이스 리모콘]

2 REAR MODE

AVC TYPE
 AVC TIME
 CAN TYPE
REAR MODE
 DEFAULT SETTING

① OEM CAM

REAR MODE
OEM CAM

② AFTER CAM

REAR MODE
AFTER CAM

③ REAR OFF

REAR MODE
REAR OFF